



Valve gate nozzle type 12NEST

Single nozzle with conventional heating element

TECHNICAL DATA

12NEST

Needle Ød	5 mm
Melt channel Ød	12 mm
Gate point Ød	3.0, 3.5 or 4.0 mm
Operating pressure	8 to 10 bar
Operating voltage	230 V _{AC} *

Nominal length of the nozzle (L) in mm

60	80	100	120	150	200	250
■	■	■	□	□	□	□

*Volts alternating current

■ available □ on request

NOTE

Power connector CMT and thermocouple connector CMLK are to be ordered separately.

Feed and discharge lines for operating the needle

Preferably, channels with a minimum dia. of 6 mm and a minimum length of 200 mm are to be used. Feed/discharge lines are to be placed in the heated mould plate to prevent overheating of the compressed air. The temperature should lie between 40 °C and 70 °C.


In the case of mould temperatures exceeding the thermal stress limit of the pneumatic valves, a separate air cooler is to be installed. Pneumatic hose inner dia. of at least 6 mm. Pneumatic valve size of at least 750 l/min.



WEBCODE
31030




Nozzle with needle guide
antechamber design LA

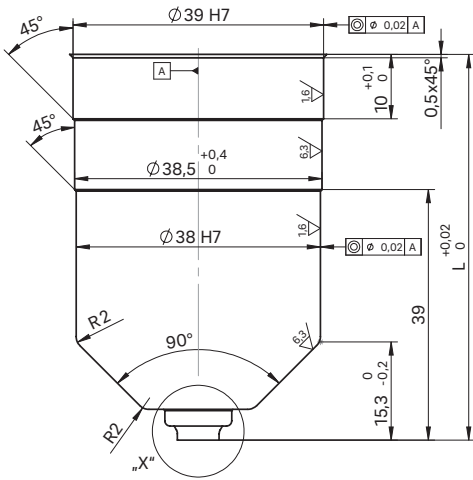


For "X" version of the needle guide
see following page


Nozzle with needle guide
antechamber design KA

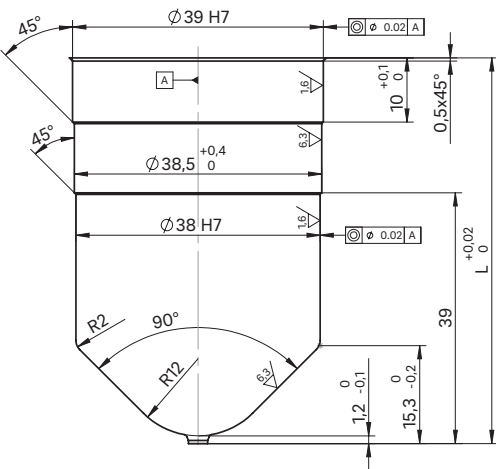


Cross-section L-L: Hole for feed/discharge air,
fastening thread and centring/positioning pin

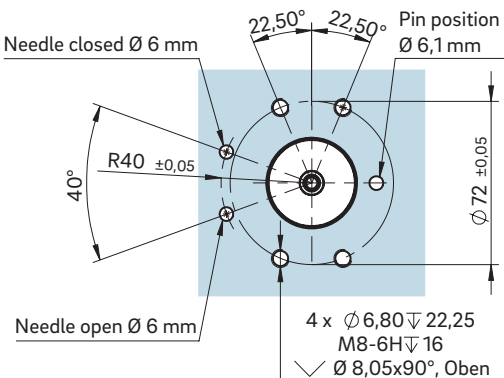

INSTALLATION

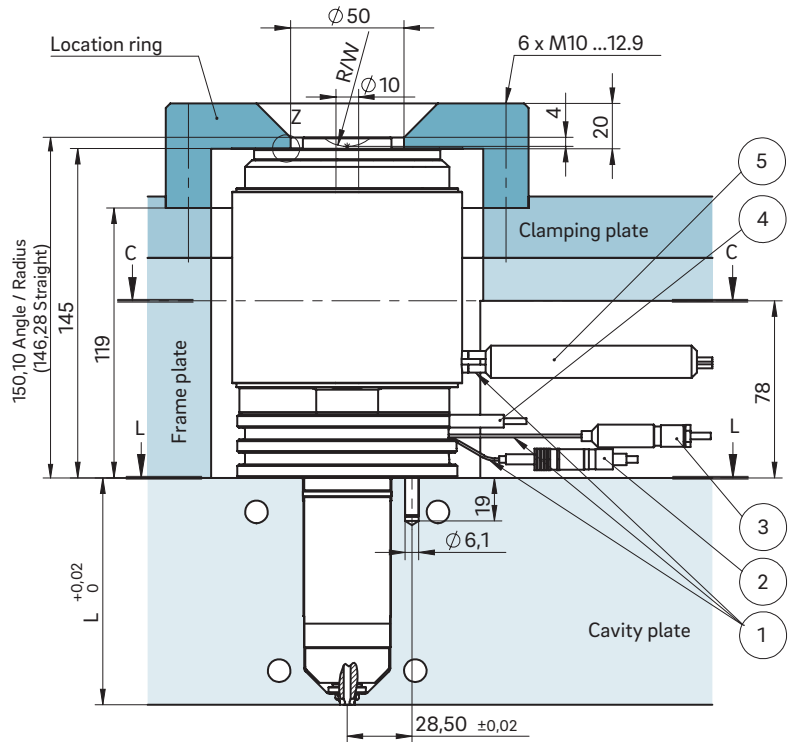


View C-C: Cutout for nozzle head, power and thermocouple plug connections

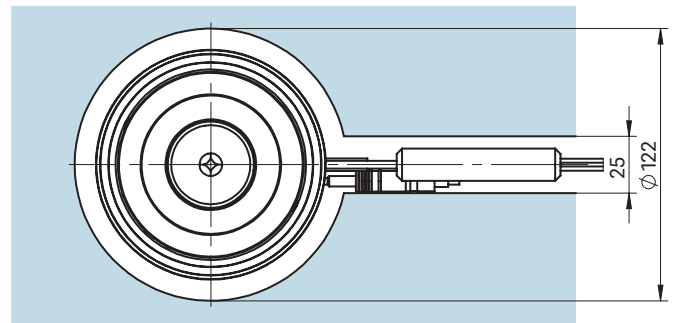

- ① Power and thermocouple plug connections in this area can be bent once; minimum radius: R8
- ② Thermocouple connector CMLK
- ③ Power connector CMT
- ④ Permanent thermocouple plug connection
- ⑤ Permanent power connection

Detail "Z"



Dimension "K" required for heat expansion is to be ensured by grinding the location ring! Determine the difference between the height of the nozzle (with mount) and the height of the structure when installed! ΔT specifies the temperature differential between the processing temperature and the mould temperature! A pretension of 0.03 mm is taken into account for the K dimensions.

ΔT (°C)	100	150	200	250	300	350
K (mm)	0.11	0.19	0.26	0.33	0.41	0.48